


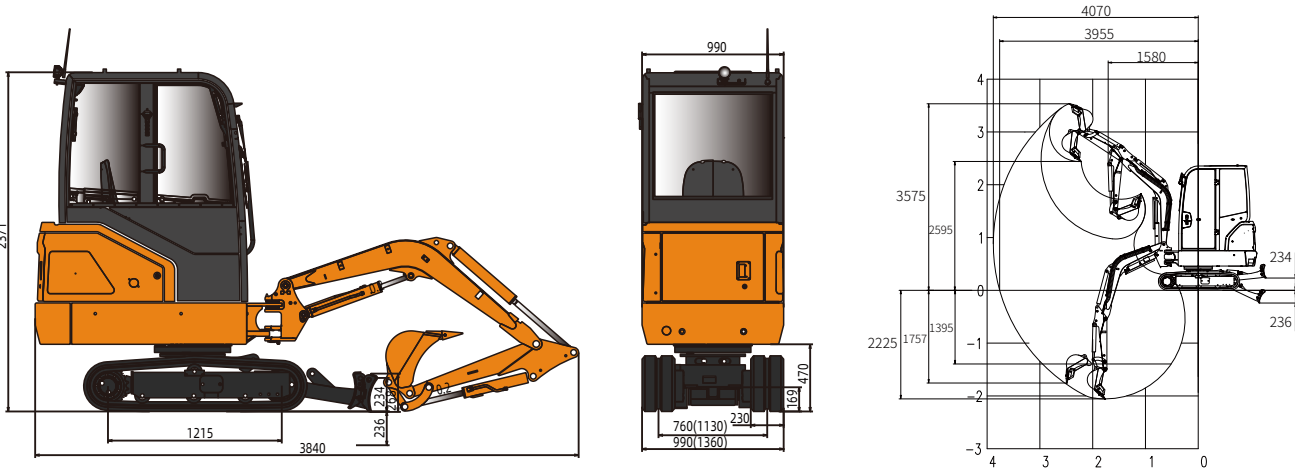

TECHNICAL PARAMETERS

Name		Data
Basic	Operating weight	2000 kg
	Standard bucket Capacity	0.04 m³
	Standard bucket Width	380 mm
	Max.Travel speed	2.5/4.5km/h
	Max.Swing speed	10 rpm
	Grade ability	30°
	Ground pressure	30 kPa
	Max.Traction force	16.7 KN
	Boom swing angle (L/R)	65°/47°
Engine	Engine brand	YANMAR
	Engine model	3TNV80
	Rated power	13.4 kW/2200 rpm
	Displacement	1.267 L
	Fuel tank	21 L
Hydraulic	Max.Flow(total)	62 L/min
	Max.Working pressure	21 MPa
	Max.Pilot pressure	3.2 Mpa
	Max.Arm digging force	12 kN
	Max.Bucket digging force	21 kN
	Hydraulic oil tank	26 L
Chassis	Track width	230 mm
	Track type	steel crawler
	Carrier rollers number	1(each side)
	Track rollers number	3(each side)
Electric	System voltage	12 V
	Battery capacity	12 V,70Ah

PRODUCT FEATURES

- Yanmar strong power engine,which meet U.S. EPA Tier 4 Final, EU Stage V emission standards. Optional 3TNV80F engine
- Hydraulic control elescopic chassis designed for narrow and complicated working conditions.
- Wider space and view are provided by enlarged front windscreen and sunroof.
- Clear monitoring instrument that is easy to operate and check.
- The tail hood can be opened to a large degree which makes easier daily inspection and change of filters.
- Retractable chassis, good trafficability and more stable.

OPTIONAL EQUIPMENT

- Front safeguard
- Fops/Tops canopy
- 260mm width bucket
- 600/1000mm width bucket
- Quick hitch pipeline
- 230mm Rubber tracks

Lonking 龙工
Efficiency Rules the Future

CDM6020
HYDRAULIC EXCAVATOR



The following blank can be used for notes or comments

For more information on Lonking products,Please contact our local agent;

Lonking (Fu Jian) International Trade Co.,Ltd.
Add: 26 Minyi Road,Xinqiao,Songjiang Industrial Zone,Shanghai
E-mail: export@lonking.cn http://www.lonkinggroup.com
Tel: +86-21-3760 2242

- OPERATING WEIGHT:** 2000kg
- ENGINE POWER:** 13.4kW
- BUCKET CAPACITY:** 0.04m³
- TRAVEL SPEED:** 2.5/4.5km/h